Helu-Special-Welding-Gun

Fourfold welding gun

Spot distance 130 mm

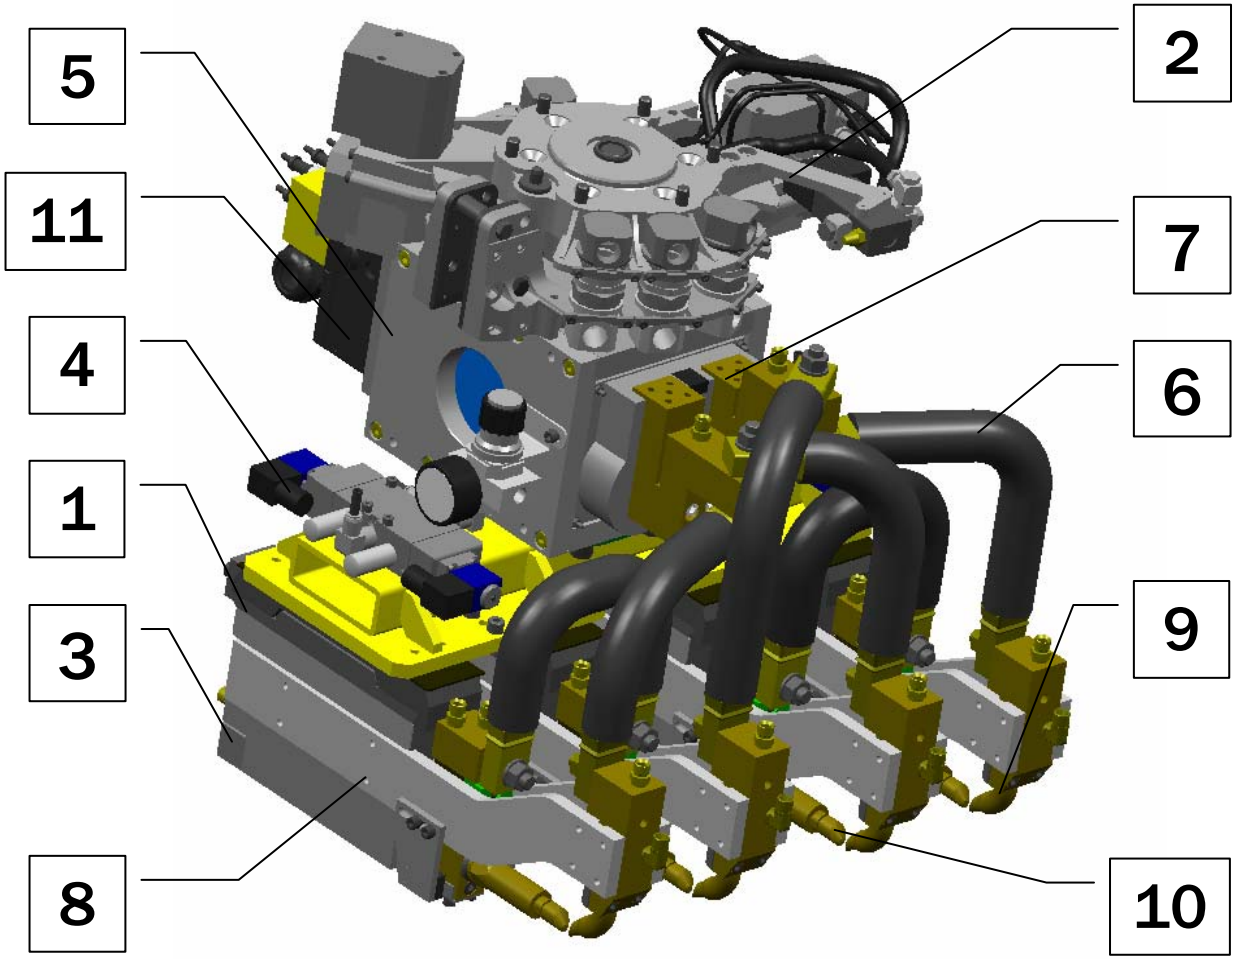

1	Basic Gun 4x MC 296
2	Flange acc. to customers requirement (here KUKA tool changer)
3	Cylinder with absorber 2x Ø44 – max. electrode force 1800N at 6 bar Working stroke 36 mm
4	Pneumatic Units acc. to customers requirement
5	Saftey cage for transformers
6	Power connection Cables 400mm²
7	Transformer 65 KVA
8	Gun arms Layout acc. to welding task Mat.: CuCrZr – CuZn40Pb2 – G-CuCr – Aluminium
9	Electrode shanks acc. to welding task
10	Electrode caps acc. to welding task
11	Terminal Box

HELU-Service GmbH Siemensstr. 12 63303 Dreieich Tel.: 06103/5719690 Fax.: 06103/5719696 e-mail: info@helu-service.de